


00-101111

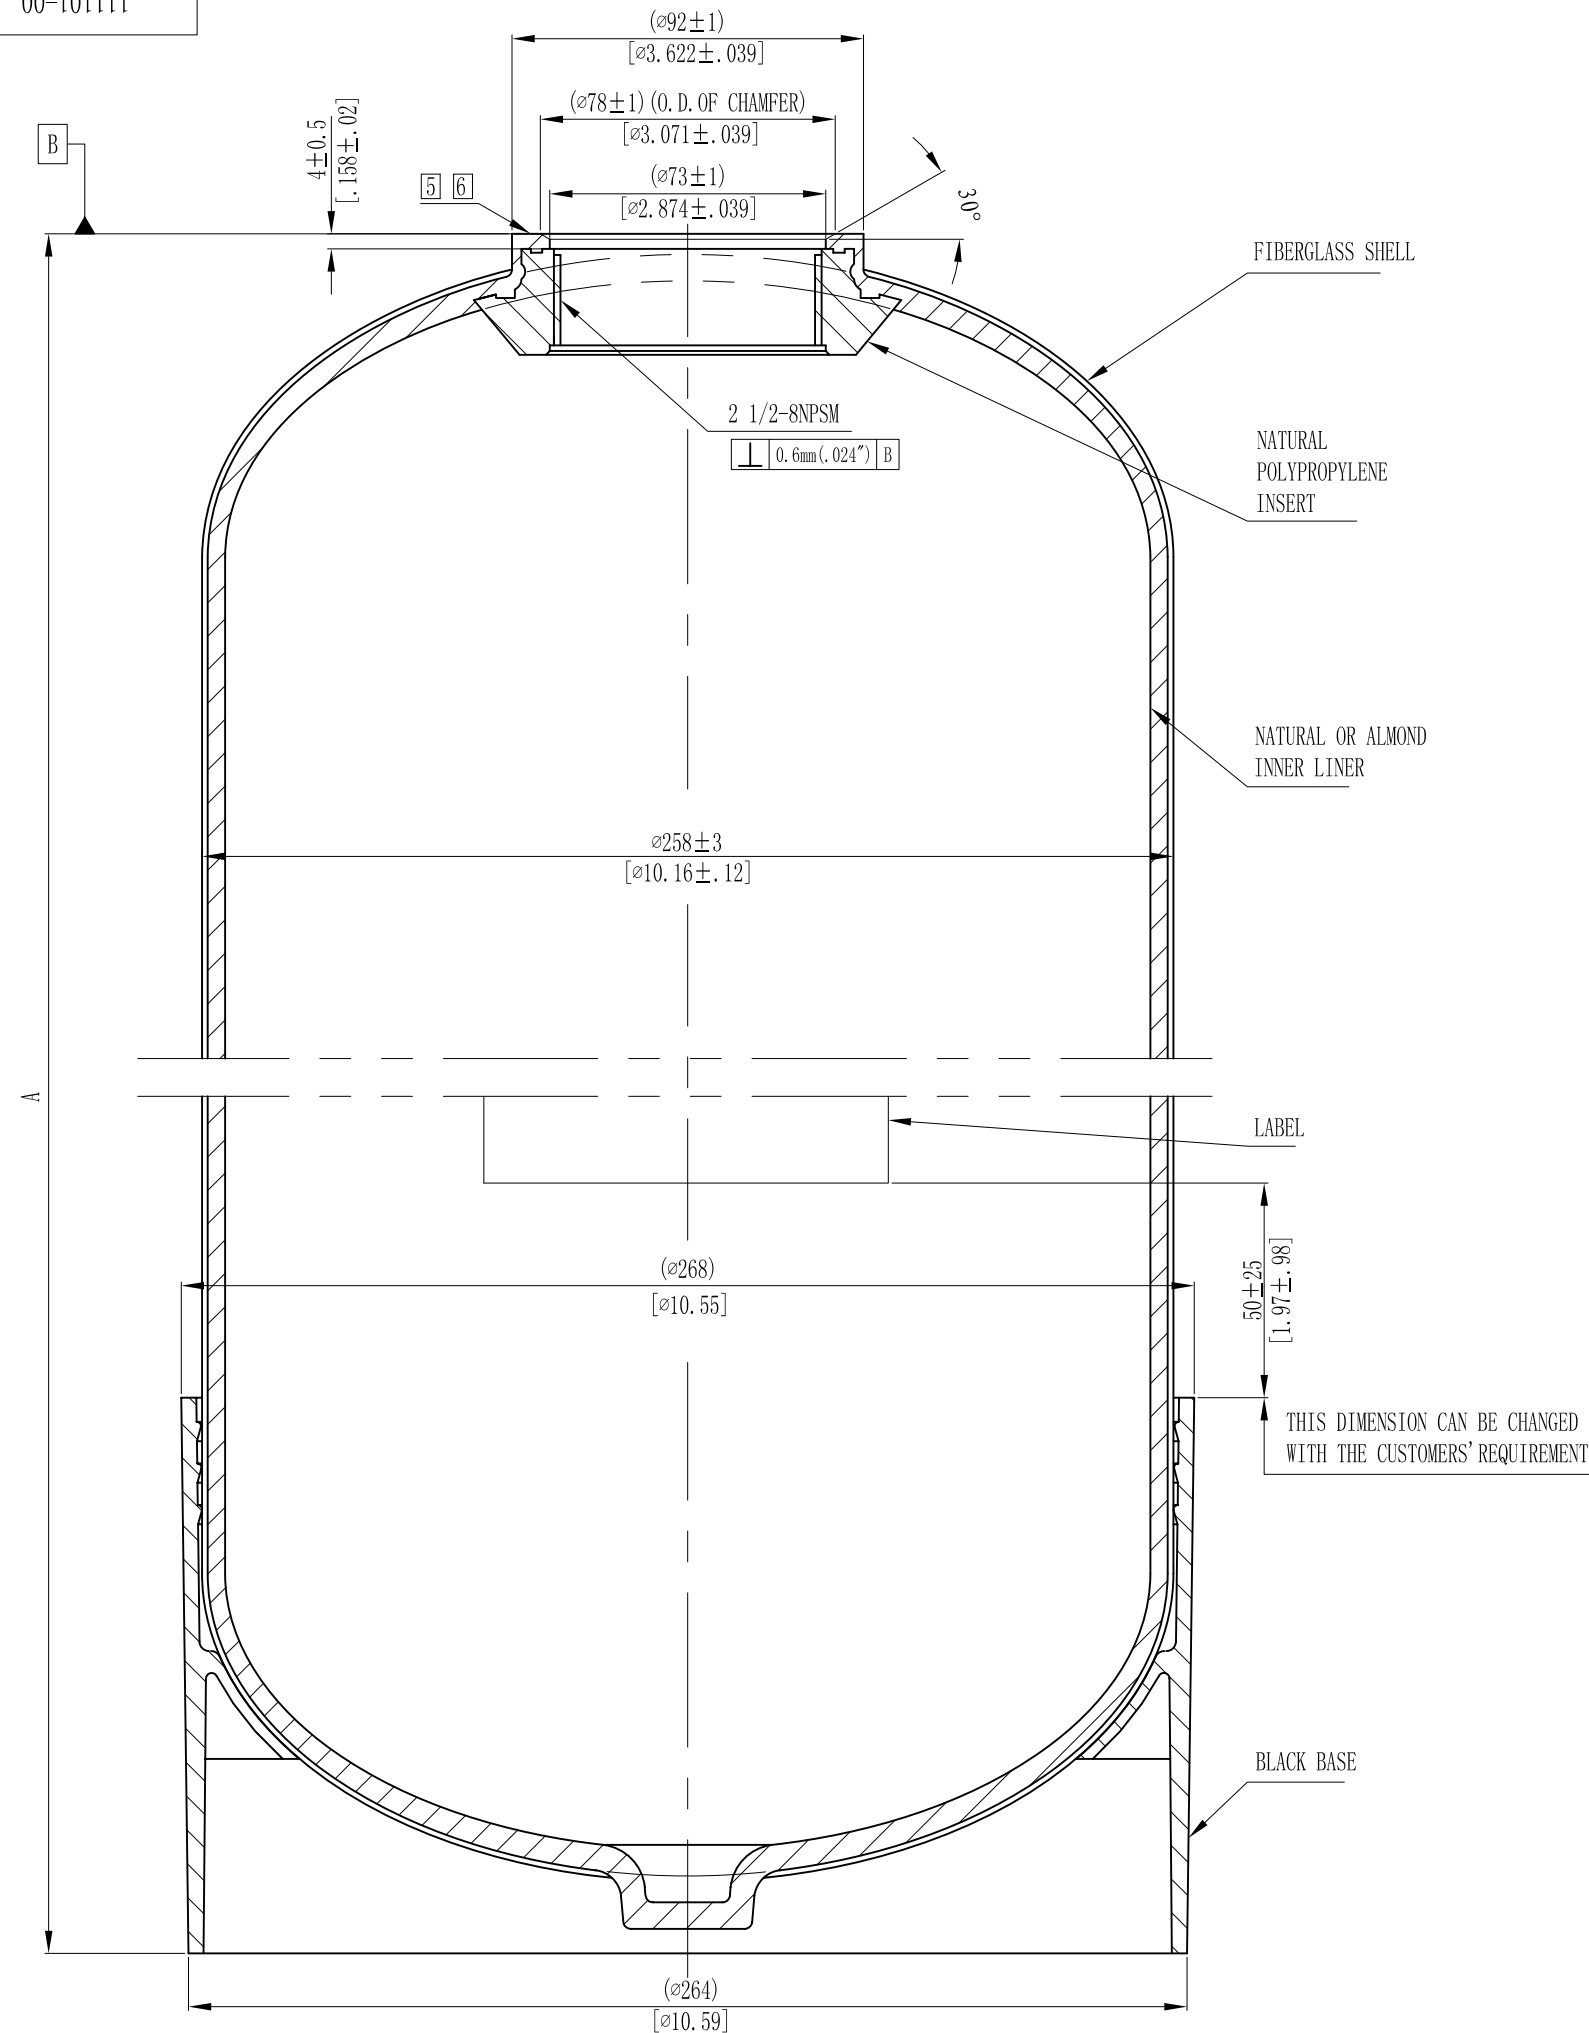

MODEL	A		VOLUME			DOME VOLUME			WEIGHT			
	mm	inch	+/-		Liters	U.S. GAL	CUBIC FT	Liters	U.S. GAL	CUBIC FT	Kg	LBS
			mm	inch								
10x17	436	17.17	4	.16	16.8	4.44	0.59	2.29	0.60	0.08	3.0	6.61
10x35	897	35.31	4	.16	38.4	10.15	1.36	2.29	0.60	0.08	5.1	11.23
10x44	1126	44.33	5	.20	50.1	13.24	1.77	2.29	0.60	0.08	6.55	14.43
10x54	1386	54.57	5	.20	62.4	16.49	2.20	2.29	0.60	0.08	7.90	17.38
10x16	403	15.87	4	.16	15.6	4.12	0.55	2.29	0.60	0.08	2.91	6.41
10x18	461	18.15	4	.16	18.0	4.76	0.64	2.29	0.60	0.08	3.17	6.98
10x19	487	19.17	4	.16	19.2	5.07	0.68	2.29	0.60	0.08	3.30	7.27
10x30	766	30.16	4	.16	32.4	8.56	1.14	2.29	0.60	0.08	4.49	9.89
10x40	1020	40.16	5	.20	44.9	11.86	1.59	2.29	0.60	0.08	5.86	12.91
10x47	1188	46.77	5	.20	54.0	14.27	1.91	2.29	0.60	0.08	6.95	15.31
10x13	345	13.58	4	.16	12.2	3.22	0.43	2.29	0.60	0.08	2.62	5.76
10x22	559	22.01	4	.16	22.9	6.05	0.81	2.29	0.60	0.08	3.66	8.05
10x24	605	23.82	4	.16	25.1	6.63	0.89	2.29	0.60	0.08	3.89	8.56

NOTES:

- 1 . TANK MUST MEET ALL APPLICABLE SPECIFICATIONS OF NSF/ANSI 044 STANDARD, LATEST REVISION.
- 2 . OPERATING SPECIFICATIONS:
  - A. MAXIMUM WORKING PRESSURE - 150 PSI (10.5BAR)
  - B. TEMPERATURE RANGE - 34-120° F (1-49°C)
  - C. MAXIMUM VACUUM - 5"Hg (127mm Hg)
- 3 . VISUAL LINER INSPECTION
  - A. NO MORE THAN 10 INTERNAL OR EXTERNAL BLEMISHES OR BURNT DEBRIS.
  - B. NO INTERNAL OR EXTERNAL BLEMISHES OR BURNT DEBRIS LARGER THAN 3×3mm.
  - C. NO INTERNAL BLEMISHES OR BURNT DEBRIS ALLOWED.
- 4 . ALL GLASS STRANDS FROM FIBERGLASS LINER TO BE BONDED AND COVERED.
- 5 . SURFACE TO BE FREE OF NICKS, SCRATCHES, RESIN AND GLASS.
- 6 . SURFACE FINISH.
- 7 . DIMENSIONS IN PARENTHESIS ARE REFERENCE ONLY.
- 8 . DIMENSIONS IN SQUARE PARENTHESIS ARE INCH UNIT.